



HANSON RIVET

& SUPPLY CO.
13241 Weidner Street
Pacoima, CA 91331

See pages D42-D47 for installation tools

Phone: 818-485-0500


FAX: 818-485-0540



Outside CA: 1-800-RRRIVET

www.hansonrivet.com

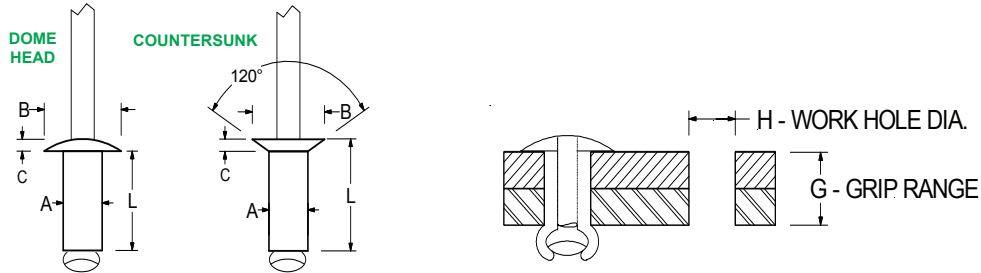

BLIND RIVETS



RIVET MATERIAL MANDREL MATERIAL	HEAD STYLE	PART NUMBER	POP®	BODY DIAMETER "A"	WORK HOLE & DRILL SIZE "H"	GRIP RANGE "G"	BODY LENGTH (MAX.) "L"	HEAD DIAMETER (NOM.) "B"	HEAD HEIGHT (MAX.) "C"	TYPICAL ULTIMATE STRENGTHS IN LBS. (SEE NOTE)			
										SHEAR	TENSILE		
MONEL RIVET ZINC FINISH 	DOME HEAD	PMSD319	MD319BS	.109	.113/.117	.020-.070	.215	.192	.028	258	292		
		PMSD321	MD321BS	7/64	#33	.070-.090	.217						
		PMSD419	MD419BS	1/8	#30	.125	.129/.133	.020-.070	.215	.246	.043	394	562
		PMSD424	MD424BS										
		PMSD429	MD429BS										
		PMSD435	MD435BS										
		PMSD440	MD440BS					.231-.280	.425				
		PMSD524	MD524BS	5/32	#20	.156	.161/.165	.000-.098	.242	.305	.053	675	900
		PMSD530	MD530BS										
		PMSD537	MD537BS										
		PMSD540	MD540BS										
		PMSD545	MD545BS										
		PMSD624	MD624BS	3/16	#11	.187	.192/.196	.020-.090	.265	.320	.055	742	844
		PMSD630	MD630BS										
PMSD636	MD636BS												
PMSD639	MD639BS												
PMSD650	MD650BS												
PMSD665	MD665BS												
PMSD675	MD675BS												
PMSD850	MD850BS	1/4	F	.250	.257/.261	.151-.300	.525	.427	.068	1215	1519		
PMSD870	MD870BS												
STEEL MANDREL 	120° COUNTERSUNK	PMSK319	MK319BS	.109	.113/.117	.051-.090	.238	.192	.038	258	292		
		PMSK321	MK321BS	7/64	#33	.091-.110	.258						
		PMSK419	MK419BS	1/8	#30	.125	.129/.133	.020-.100	.246	.245	.050	394	562
		PMSK424	MK424BS										
		PMSK429	MK429BS										
		PMSK435	MK435BS										
		PMSK440	MK440BS					.261-.310	.456				
		PMSK524	MK524BS	5/32	#20	.156	.153/.159	.081-.130	.299	.304	.064	675	900
		PMSK530	MK530BS										
		PMSK537	MK537BS										
		PMSK540	MK540BS										
		PMSK545	MK545BS										
		PMSK624	MK624BS	3/16	#11	.187	.192/.196	.050-.120	.305	.320	.055	742	844
		PMSK630	MK630BS										
PMSK636	MK636BS												
PMSK639	MK639BS												
PMSK650	MK650BS												
PMSK665	MK665BS												
PMSK675	MK675BS												
PMSK850	MK850BS	1/4	F	.250	.257/.261	.000-.297	.500	.425	.069	1215	1519		
PMSK870	MK870BS												

OTHER COLORS AND FINISHES AVAILABLE

NOTE: Values for typical ultimate strengths are a guide only and may vary greatly depending upon the application.