



HANSON RIVET

& SUPPLY CO.
13241 Weidner Street
Pacoima, CA 91331

See pages D42-D47 for
installation tools

Phone: 818-485-0500


FAX: 818-485-0540

Outside CA: 1-800-RRRIVET

www.hansonrivet.com




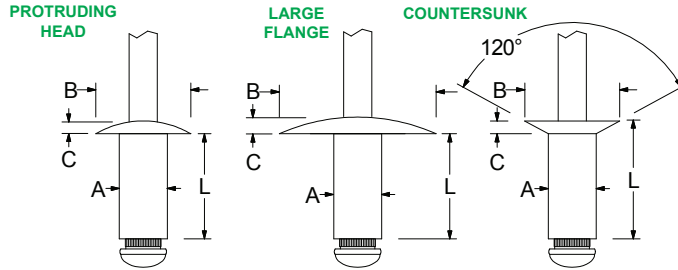

"Q" STYLE BLIND RIVETS



Q Rivets offer greater shear strength and 100% mandrel retention! The mandrel is designed to effect a weather-tight seal when installed properly and provide good vibration resistance.

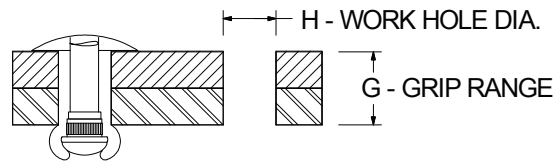***NOTE: Mandrels break flush with the rivet head when in the Mid-Grip Range (except -04-01's which break at .062)**



RIVET MATERIAL MANDREL MATERIAL	HEAD STYLE	PART NUMBER	Avdel®	BODY DIAMETER (NOM.) "A"	WORK HOLE & DRILL SIZE "H"	GRIP RANGE (SEE NOTE ABOVE) "G"			BODY LENGTH (MAX.) "L"	HEAD DIAMETER (NOM.) "B"	HEAD HEIGHT (MAX.) "C"	TYPICAL ULTIMATE STRENGTHS IN LBS. (SEE NOTE)	
						MIN	MID*	MAX				SHEAR	TENSILE
STAINLESS RIVET PLAIN FINISH  STAINLESS MANDREL  <small>OTHER COLORS AND FINISHES AVAILABLE</small>	PROTRUDING HEAD	QTTD401	CCPQ-04-01	.125 1/8	.129/.133 #30	-	-.063	-.093	.212	.250	.042	700	600
		QTTD402	CCPQ-04-02			.062	.093	.125	.275				
		QTTD403	CCPQ-04-03			.094	.125	.187	.337				
		QTTD404	CCPQ-04-04			.126	.187	.250	.400				
		QTTD405	CCPQ-04-05			.188	.250	.312	.462				
		QTTD406	CCPQ-04-06			.251	.312	.375	.535				
		QTTD502	CCPQ-05-02	.156 5/32	.160/.164 #20	.062	.093	.125	.300				
		QTTD504	CCPQ-05-04			.126	.187	.250	.425				
		QTTD506	CCPQ-05-06			.251	.312	.375	.550				
		QTTD602	CCPQ-06-02	.187 3/16	.192/.196 #11	.062	.093	.125	.325				
		QTTD604	CCPQ-06-04			.126	.187	.250	.450				
		QTTD606	CCPQ-06-06			.251	.312	.375	.575				
	QTTD608	CCPQ-06-08	.376			.437	.500	.700					
	QTTD802	CCPQ-08-02	.250 1/4	.257/.261 F	.062	.093	.125	.375					
	QTTD804	CCPQ-08-04			.126	.187	.250	.500					
	QTTD806	CCPQ-08-06			.251	.312	.375	.625					
	QTTD808	CCPQ-08-08			.376	.437	.500	.750					
	QTTD810	CCPQ-08-10			.501	.562	.625	.900					
	LARGE FLANGE	QTTL402	CCLQ-04-02	.125 1/8	.129/.133 #30	.063	.093	.125	.337				
		QTTL404	CCLQ-04-04			.126	.187	.250	.400				
		QTTL406	CCLQ-04-06			.251	.312	.375	.462				
		QTTL504	CCLQ-05-04	.156 5/32	.160/.164 #20	.126	.187	.250	.425				
		QTTL506	CCLQ-05-06			.251	.312	.375	.550				
QTTL604	CCLQ-06-04	.187 3/16	.192/.196 #11	.126	.187	.250	.325						
QTTL606	CCLQ-06-06			.251	.312	.375	.450						
QTTL608	CCLQ-06-08			.376	.437	.500	.575						
120° COUNTERSUNK	QTTK403	CCCQ-04-03	.125 1/8	.129/.133 #30	.094	.125	.187	.337					
	QTTK404	CCCQ-04-04			.126	.187	.250	.400					
	QTTK405	CCCQ-04-05			.188	.250	.312	.462					
	QTTK406	CCCQ-04-06			.251	.312	.375	.535					
	QTTK504	CCCQ-05-04			.156 5/32	.160/.164 #20	.126	.187	.250	.425			
	QTTK506	CCCQ-05-06					.251	.312	.375	.550			
	QTTK604	CCCQ-06-04	.187 3/16	.192/.196 #11	.126	.187	.250	.450					
	QTTK606	CCCQ-06-06			.251	.312	.375	.575					
	QTTK608	CCCQ-06-08			.376	.437	.500	.700					
	QTTK804	CCCQ-08-04	.250 1/4	.257/.261 F	.126	.187	.250	.500					
QTTK806	CCCQ-08-06	.251			.312	.375	.625						
QTTK808	CCCQ-08-08	.376			.437	.500	.750						
QTTK810	CCCQ-08-10	.501			.562	.625	.900						