



HANSON RIVET & SUPPLY CO.
13241 Weidner Street
Pacoima, CA 91331

Phone: 818-485-0500

FAX: 818-485-0540

Outside CA: 1-800-RRRIVET


www.hansonrivet.com



ALUMINUM DRIVE RIVETS



southco[®]
AUTHORIZED DISTRIBUTOR

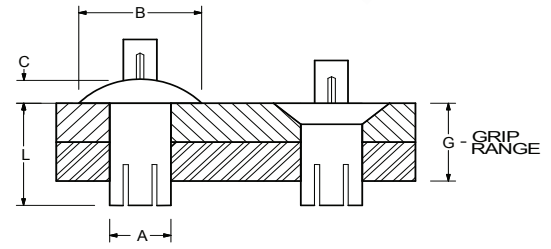


- Blind - install from one side
- Strong shear strength and vibration resistant
- Easy installation with a hammer or power tools
- Simply drive the pin into the head to set the rivet


| BODY DIAMETER "A" | GRIP RANGE "G" | LENGTH "L" | UNIVERSAL HEAD "B" Head Diameter .250 "C" Head Height .054 | 100° COUNTERSUNK HEAD "B" Head Diameter .216 "C" Head Height .042 | BRAZIER HEAD "B" Head Diameter .312 "C" Head Height .062 |
|---------------------|----------------|------------|--|---|--|
| .125 1/8 | .015-.046 | 5/32 | 38-104-01-13 | | |
| | .046-.078 | 5/32 | 38-104-02-13 | | |
| | .078-.109 | 3/16 | 38-104-03-13 | 38-504-03-13 | 38-204-03-13 |
| | .109-.140 | 7/32 | 38-104-04-13 | 38-504-04-13 | 38-204-04-13 |
| | .140-.171 | 1/4 | 38-104-05-13 | 38-504-05-13 | 38-204-05-13 |
| | .171-.203 | 9/32 | 38-104-06-13 | 38-504-06-13 | 38-204-06-13 |
| | .203-.234 | 5/16 | 38-104-07-13 | 38-504-07-13 | 38-204-07-13 |
| | .234-.265 | 11/32 | 38-104-08-13 | 38-504-08-13 | 38-204-08-13 |
| | .265-.296 | 3/8 | 38-104-09-13 | 38-504-09-13 | 38-204-09-13 |
| | .296-.328 | 13/32 | 38-104-10-13 | 38-504-10-13 | |
| | .328-.359 | 7/16 | 38-104-11-13 | 38-504-11-13 | |
| | .359-.390 | 15/32 | 38-104-12-13 | 38-504-12-13 | 38-204-12-13 |
| | .390-.421 | 1/2 | 38-104-13-13 | 38-504-13-13 | |
| | .421-.453 | 17/32 | 38-104-14-13 | | |

| BODY DIAMETER "A" | GRIP RANGE "G" | LENGTH "L" | UNIVERSAL HEAD "B" Head Diameter .312 "C" Head Height .067 | 100° COUNTERSUNK HEAD "B" Head Diameter .278 "C" Head Height .055 |
|----------------------|----------------|--------------|--|---|
| .156 5/32 | .015-.046 | 3/16 | 38-105-01-13 | |
| | .046-.078 | 3/16 | 38-105-02-13 | |
| | .078-.109 | 7/32 | 38-105-03-13 | |
| | .109-.140 | 1/4 | 38-105-04-13 | 38-505-04-13 |
| | .140-.171 | 9/32 | 38-105-05-13 | 38-505-05-13 |
| | .171-.203 | 5/16 | 38-105-06-13 | 38-505-06-13 |
| | .203-.234 | 11/32 | 38-105-07-13 | 38-505-07-13 |
| | .234-.265 | 3/8 | 38-105-08-13 | 38-505-08-13 |
| | .265-.296 | 13/32 | 38-105-09-13 | 38-505-09-13 |
| | .296-.328 | 7/16 | 38-105-10-13 | 38-505-10-13 |
| | .328-.359 | 15/32 | 38-105-11-13 | 38-505-11-13 |
| | .359-.390 | 1/2 | 38-105-12-13 | 38-505-12-13 |
| | .390-.421 | 17/32 | 38-105-13-13 | 38-505-13-13 |
| | .421-.453 | 9/16 | 38-105-14-13 | 38-505-14-13 |
| | .453-.484 | 19/32 | 38-105-15-13 | 38-505-15-13 |
| | .484-.515 | 5/8 | 38-105-16-13 | 38-505-16-13 |
| .515-.546 | 21/32 | 38-105-17-13 | 38-505-17-13 | |
| .546-.578 | 11/16 | 38-105-18-13 | 38-505-18-13 | |
| .578-.609 | 23/32 | 38-105-19-13 | 38-505-19-13 | |
| .609-.640 | 3/4 | 38-105-20-13 | 38-505-20-13 | |


| BODY DIAMETER "A" | GRIP RANGE "G" | LENGTH "L" | UNIVERSAL HEAD "B" Head Diameter .375 "C" Head Height .080 | 100° COUNTERSUNK HEAD "B" Head Diameter .344 "C" Head Height .070 | BRAZIER HEAD "B" Head Diameter .469 "C" Head Height .094 |
|----------------------|----------------|------------|--|---|--|
| .187 3/16 | .047-.140 | 1/4 | 38-106-02-16 | | 38-206-02-16 |
| | .078-.171 | 9/32 | 38-106-04-16 | | 38-206-04-16 |
| | .140-.234 | 11/32 | 38-106-06-16 | 38-506-06-16 | 38-206-06-16 |
| | .203-.296 | 13/32 | 38-106-08-16 | 38-506-08-16 | 38-206-08-16 |
| | .265-.359 | 15/32 | 38-106-10-16 | 38-506-10-16 | 38-206-10-16 |
| | .328-.421 | 17/32 | 38-106-12-16 | 38-506-12-16 | 38-206-12-16 |
| | .390-.484 | 19/32 | 38-106-14-16 | 38-506-14-16 | 38-206-14-16 |
| | .453-.546 | 21/32 | 38-106-16-16 | 38-506-16-16 | 38-206-16-16 |
| | .515-.609 | 23/32 | 38-106-18-16 | 38-506-18-16 | 38-206-18-16 |
| | .578-.671 | 25/32 | 38-106-20-16 | 38-506-20-16 | 38-206-20-16 |
| | .640-.734 | 27/32 | 38-106-22-16 | 38-506-22-16 | 38-206-22-16 |
| | .703-.796 | 29/32 | 38-106-24-16 | 38-506-24-16 | 38-206-24-16 |
| | .765-.859 | 31/32 | 38-106-26-16 | 38-506-26-16 | 38-206-26-16 |
| | .828-.921 | 1-1/32 | 38-106-28-16 | 38-506-28-16 | 38-206-28-16 |
| | .890-.984 | 1-3/32 | 38-106-30-16 | 38-506-30-16 | 38-206-30-16 |
| | .953-1.047 | 1-5/32 | 38-106-32-16 | 38-506-32-16 | 38-206-32-16 |



UNIVERSAL HEAD



100° COUNTERSUNK



BRAZIER HEAD

| BODY DIAMETER "A" | GRIP RANGE "G" | LENGTH "L" | UNIVERSAL HEAD "B" Head Diameter .500 "C" Head Height .107 | 100° COUNTERSUNK HEAD "B" Head Diameter .467 "C" Head Height .095 | BRAZIER HEAD "B" Head Diameter .625 "C" Head Height .125 |
|---------------------|----------------|------------|--|---|--|
| .250 1/4 | .047-.140 | 1/4 | 38-108-02-16 | | 38-208-02-16 |
| | .078-.171 | 9/32 | 38-108-04-16 | | 38-208-04-16 |
| | .140-.234 | 11/32 | 38-108-06-16 | 38-508-06-16 | 38-208-06-16 |
| | .203-.296 | 13/32 | 38-108-08-16 | 38-508-08-16 | 38-208-08-16 |
| | .265-.359 | 15/32 | 38-108-10-16 | 38-508-10-16 | 38-208-10-16 |
| | .328-.421 | 17/32 | 38-108-12-16 | 38-508-12-16 | 38-208-12-16 |
| | .390-.484 | 19/32 | 38-108-14-16 | 38-508-14-16 | 38-208-14-16 |
| | .453-.546 | 21/32 | 38-108-16-16 | 38-508-16-16 | 38-208-16-16 |
| | .515-.609 | 23/32 | 38-108-18-16 | 38-508-18-16 | 38-208-18-16 |
| | .578-.671 | 25/32 | 38-108-20-16 | 38-508-20-16 | 38-208-20-16 |
| | .640-.734 | 27/32 | 38-108-22-16 | 38-508-22-16 | 38-208-22-16 |
| | .703-.796 | 29/32 | 38-108-24-16 | 38-508-24-16 | 38-208-24-16 |
| | .765-.859 | 31/32 | 38-108-26-16 | 38-508-26-16 | 38-208-26-16 |
| | .828-.921 | 1-1/32 | 38-108-28-16 | 38-508-28-16 | 38-208-28-16 |
| | .890-.984 | 1-3/32 | 38-108-30-16 | 38-508-30-16 | 38-208-30-16 |
| | .953-1.047 | 1-5/32 | 38-108-32-16 | 38-508-32-16 | 38-208-32-16 |

| BODY DIAMETER "A" | GRIP RANGE "G" | LENGTH "L" | UNIVERSAL HEAD "B" Head Diameter .625 "C" Head Height .138 |
|----------------------|----------------|------------|--|
| .312 5/16 | .132-.242 | 7/16 | 38-110-06-16 |
| | .226-.336 | 17/32 | 38-110-09-16 |
| | .320-.430 | 5/8 | 38-110-12-16 |
| | .414-.523 | 23/32 | 38-110-15-16 |
| | .508-.617 | 13/16 | 38-110-18-16 |
| | .601-.711 | 29/32 | 38-110-21-16 |
| | .695-.804 | 1 | 38-110-24-16 |
| | .789-.898 | 1-3/32 | 38-110-27-16 |
| | .882-.992 | 1-3/16 | 38-110-30-16 |
| | .976-1.086 | 1-9/32 | 38-110-33-16 |

| BODY DIAMETER "A" | GRIP RANGE "G" | LENGTH "L" | UNIVERSAL HEAD "B" Head Diameter .750 "C" Head Height .166 |
|---------------------|----------------|------------|--|
| .375 3/8 | .125-.250 | 1/2 | 38-112-06-16 |
| | .218-.343 | 19/32 | 38-112-09-16 |
| | .312-.437 | 11/16 | 38-112-12-16 |
| | .406-.531 | 25/32 | 38-112-15-16 |
| | .500-.625 | 7/8 | 38-112-18-16 |
| | .593-.718 | 31/32 | 38-112-21-16 |
| | .687-.813 | 1-1/16 | 38-112-24-16 |
| | .781-.906 | 1-5/32 | 38-112-27-16 |
| | .875-1.000 | 1-1/4 | 38-112-30-16 |
| | .968-1.093 | 1-11/32 | 38-112-33-16 |