



HANSON RIVET

& SUPPLY CO.
13241 Weidner Street
Pacoima, CA 91331

Phone: 818-485-0500
FAX: 818-485-0540

Outside CA: 1-800-RRRIVET
www.hansonrivet.com




RUBBER-NUT THREADED INSERTS



RUBBER-NUTS are a flanged rubber bushing with a brass machine nut molded into one end.

When seated in the work piece, a conventional machine screw is threaded through the head of the Rubber-Nut into the brass nut and tightened. This causes the insert to expand, making a secure fastening.

- Removable
- Muffles noise
- Fastens in blind holes
- Easy one-step installation
- Dampens vibration and shock
- Helps prevent galvanic corrosion
- Helps seal out ambient moisture
- No installation tool required

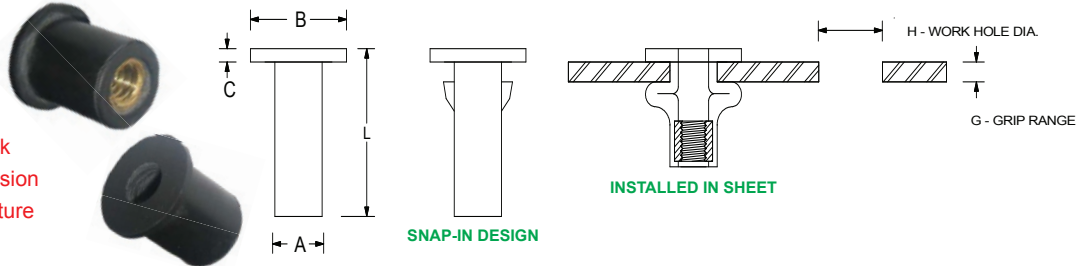

THREAD SIZE	PART NUMBER	POP® REFERENCE	BODY DIAMETER "A"	WORK HOLE DIAMETER "H"	GRIP RANGE "G"	LENGTH OVER ALL "L"	HEAD DIAMETER "B"	HEAD HEIGHT "C"	TEST RESULTS (See Note)		
									TEST PLATE THICKNESS	TIGHTENING TORQUE (in.-lbs.)	ULTIMATE TENSILE (lbs.)
6-32	RN-0632-1	C632	.240	.250	.375-.607	.981	.554	.035	.500	3	115
	RN-0632-2	E632	.312	.312	.015-.156	.499	.452	.062	.062	4	114
	RN-0632-2E	--	.312	.312	.015-.156	.496	.433	.047	.062	4	114
8-32	RN-0832-1	B832	.312	.312	.015-.156	.499	.438	.052	.062	3	146
	RN-0832-2	C832	.312	.312	.015-.172	.560	.750	.060	.063	3	130
	RN-0832-3	2D832*	.310	.312	.015-.050	.430	.500	.050	.031	5	91
10-24	RN-1024-1	A1024*	.375	.375	.015-.050	.562	.562	.125	.031	5	156
	RN-1024-2	L1024	.375	.375	.030-.227	.767	.562	.187	.125	5	95
10-32	RN-1032-1	10S	.375	.375	.015-.192	.554	.500	.036	.125	5	230
	RN-1032-2	10SL	.375	.375	.312-.643	1.051	.562	.051	.500	3	315
	RN-1032-3	10XL	.375	.375	.812-1.143	1.551	.562	.051	1.050	10	371
	RN-1032-4	G1032	.375	.375	.030-.227	.807	.750	.187	.125	5	277
	RN-1032-5	H1032	.375	.375	.312-.450	.847	.554	.035	.375	3	260
	RN-1032-6	J1032	.375	.375	.030-.227	.700	.750	.080	.125	5	225
	RN-1032-7	NP1032*	.375	.375	.015-.050	.400	.510	.059	.050	5	230
	RN-1032-8	N1032*	.375	.375	.015-.050	.431	.625	.051	.050	5	150
	RN-1032-9	Q1032	.375	.375	.035-.232	.665	.562	.040	.125	5	265
1/4-20	RN-2520-01	HSCM6X1	.492	.500	.015-.094	.630	.580	.060	.075	10	225
	RN-2520-02	EM6X1	.492	.500	.015-.094	.630	.679	.051	.031	14	120
	RN-2520-03	ACM6X1*	.492	.500	.015-.062	.630	.787	.051	.062	10	294
	RN-2520-04	1/4A	.500	.500	.015-.050	.629	.629	.111	.075	10	290
	RN-2520-05	1/4S	.500	.500	.015-.111	.630	.630	.051	.075	10	230
	RN-2520-06	D1420	.500	.500	.031-.187	.829	.750	.187	.075	10	280
	RN-2520-07	J1420	.500	.500	.250-.457	1.051	.635	.051	.187	15	280
	RN-2520-07E	--	.500	.500	.250-.457	1.051	.641	.079	.187	15	280
	RN-2520-08	JM1420	.500	.500	.215-.422	1.440	.635	.440	.250	10	445
	RN-2520-08E	--	.500	.500	.215-.422	1.380	.635	.052	.250	20	140
	RN-2520-09	M6X1	.500	.500	.015-.094	.630	.787	.051	.075	10	223
	RN-2520-10	MDM6X1	.500	.500	.031-.187	.829	.740	.187	.187	15	310
	RN-2520-11	MDLM6X1	.500	.500	.031-.187	.829	.945	.187	.187	15	310
RN-2520-12	W1420	.500	.500	.187-.343	.801	.635	.051	.187	10	360	
RN-2025-13	AC1420	.562	.562	.280-.500	1.301	.635	.051	.397	20	251	
5/16-18	RN-3118-1	ET51618*	.618	.625	.015-.118	1.102	.874	.334	.125	8	386
	RN-3118-2	E51618	.620	.625	.015-.156	.725	.875	.125	.151	25	457
	RN-3118-2E	--	.620	.625	.015-.156	.725	.847	.125	.151	25	457
	RN-3118-3	F51618	.620	.625	.156-.375	1.100	.875	.225	.375	15	558
	RN-3118-3E	--	.620	.625	.156-.375	1.100	.847	.225	.375	15	558
RN-3118-4	A51618	.748	.750	.015-.237	1.063	1.260	.197	.187	20	441	
3/8-16	RN-3716-1	A3816	.750	.750	.015-.437	1.062	1.250	.187	.437	20	1500
	RN-3716-1E	--	.750	.750	.015-.437	1.062	1.161	.187	.437	20	1500
	RN-3716-2	Z3816	.750	.750	.015-.125	1.050	1.730	.350	.125	30	1125

* Has the Snap-in-Design. NOTE: Values for tightening torques and ultimate tensile strengths are a guide only and may vary greatly depending upon the application.

360900 WELL-NUT® & JACK NUT® R&D KIT

Includes 6 Well-Nut and 6 Jack-Nut styles which are representative of the capabilities of these product lines.

Kit includes the following parts:

Well-Nuts: C632, B832, J032, E51618, A3816
Jack-Nuts: 4SJN, 6SJN, 8SJN, 8SJN COATED, 8SJN RAIN TITE.



WNK-200N MARINE WELL-NUT® KIT

Contains an assortment of Well-Nut Threaded Inserts for numerous marine applications.

They are designed to seal out ambient moisture, muffle noise, and dampen vibration.

Kit includes the following parts:

B832, Q1032, 10SL, 1/4SL, D1420 & J1420.

