



HANSON RIVET

& SUPPLY CO.
13241 Weidner Street
Pacoima, CA 91331





See pages D74-D88 for
installation tools and
machines

Phone: 818-485-0500
FAX: 818-485-0540

Outside CA: 1-800-RRRIVET
www.hansonrivet.com



TUBULAR RIVETS

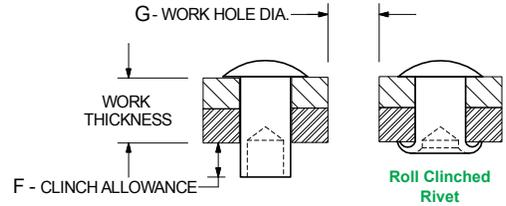

* LENGTH (in 32nds) = WORK THICKNESS + CLINCH ALLOWANCE "F" (Example Part #: C1-9-ST for 1/8 x 9/32 - specify material and finish)

NOMINAL BODY DIAMETER	PART NUMBER PREFIX	HEAD STYLE	BODY DIAMETER "A" MIN / MAX	HEAD DIAMETER "B" MIN / MAX	HEAD HEIGHT "C" MIN / MAX	HOLE DEPTH "D" CAN VARY	FILLET RADIUS "E"	CLINCH ALLOWANCE "F"	WORK HOLE "G"	
3/64	AAA1- *-ST	OVAL	.046/.049	.078/.083	.011/.014	.035	.003	.027	.052	
	AAA2- *-ST	TRUSS	.046/.049	.090/.094	.018/.022	.035	.003	.027	.052	
1/16	AA1- *-ST	OVAL	.058/.061	.104/.114	.015/.019	.044	.005	.037	.064	
	AA2- *-ST	TRUSS	.058/.061	.120/.130	.015/.019	.044	.005	.037	.064	
	AAX2- *-ST	TRUSS	.062/.065	.123/.128	.023/.027	.047	.005	.039	.070	
	AA100- *-ST	100° COUNTERSUNK	.058/.061	.106/.112	.020/.024	.043	.005	.037	.064	
3/32	AB1- *-ST	OVAL	.085/.089	.142/.152	.020/.026	.064	.010	.054	.096	
	AB8- *-ST	TRUSS	.085/.089	.182/.192	.020/.026	.064	.010	.054	.096	
	BC1- *-ST	TRUSS	.095/.099	.182/.192	.026/.032	.071	.012	.060	.107	
	AB100- *-ST	100° COUNTERSUNK	.085/.089	.164/.172	.037/.043	.064	.010	.054	.096	
	AB101- *-ST	100° COUNTERSUNK	.085/.089	.142/.152	.028/.033	.064	.010	.054	.096	
1/8	C1- *-ST	OVAL	.118/.123	.213/.223	.030/.038	.089	.016	.074	.129	
	C4- *-ST	TRUSS	.118/.123	.276/.286	.030/.038	.089	.016	.074	.129	
	CD1- *-ST	OVAL	.120/.125	.214/.222	.030/.035	.089	.016	.075	.136	
	C100- *-ST	100° COUNTERSUNK	.118/.123	.245/.255	.059/.065	.089	.016	.074	.129	
	C101- *-ST	100° COUNTERSUNK	.118/.123	.213/.223	.044/.050	.089	.016	.074	.129	
	C120- *-ST	120° COUNTERSUNK	.118/.123	.214/.222	.030/.035	.089	.016	.074	.129	
9/64	D1- *-ST	OVAL	.141/.146	.229/.239	.035/.045	.106	.020	.088	.156	
	D3- *-ST	TRUSS	.141/.146	.306/.318	.035/.045	.106	.020	.088	.156	
	D5- *-ST	TRUSS	.141/.146	.370/.380	.059/.065	.106	.020	.088	.156	
	D100- *-ST	100° COUNTERSUNK	.141/.146	.307/.317	.075/.081	.106	.020	.088	.156	
	D101- *-ST	100° COUNTERSUNK	.141/.146	.229/.239	.041/.046	.106	.020	.088	.156	
5/32	DF4- *-ST	OVAL	.150/.156	.245/.255	.043/.049	.113	.020	.094	.166	
	DF11- *-ST	TRUSS	.150/.156	.307/.317	.043/.049	.113	.020	.094	.166	
	DF100- *-ST	100° COUNTERSUNK	.150/.156	.273/.283	.050/.060	.113	.020	.094	.166	
3/16	E1- *-ST	OVAL	.182/.188	.306/.318	.055/.065	.137	.020	.122	.201	
	E3- *-ST	TRUSS	.182/.188	.369/.381	.055/.065	.137	.025	.122	.201	
	E100- *-ST	100° COUNTERSUNK	.182/.188	.354/.364	.078/.084	.137	.020	.122	.201	
	E101- *-ST	100° COUNTERSUNK	.182/.188	.306/.318	.057/.067	.137	.020	.122	.201	
7/32	FE1- *-ST	TRUSS	.210/.217	.430/.444	.061/.075	.159	.025	.140	.234	
1/4	G4- *-ST	OVAL	.244/.252	.430/.444	.073/.083	.182	.030	.164	.266	
	G11- *-ST	TRUSS	.244/.252	.490/.510	.071/.085	.182	.030	.164	.266	
	G100- *-ST	100° COUNTERSUNK	.244/.252	.455/.475	.093/.103	.182	.030	.164	.266	
5/16	T1- *-ST	OVAL	.302/.310	.490/.510	.071/.085	.227	.030	.203	.332	
	T2- *-ST	OVAL	.302/.310	.550/.570	.086/.100	.227	.030	.203	.332	
	T5- *-ST	TRUSS	.302/.310	.745/.755	.150/.160	.227	.030	.203	.332	
3/8	U2- *-ST	OVAL	.370/.380	.615/.635	.095/.105	.281	.032	.225	.390	
	U3- *-ST	TRUSS	.370/.380	.680/.700	.120/.130	.281	.040	.225	.390	
7/16		We carry limited sizes of 7/16" and 1/2" diameter tubular rivets in stock.								
1/2		Please call us with your requirements.								

Standard materials: **STEEL • ALUMINUM • BRASS • COPPER • STAINLESS STEEL • MONEL**

Many finishes and colors available. We also stock many non-standard sizes.

NOTE: Countersunk head dimensions may be theoretical to sharp edge of head. For other Head Styles please call our sales department.