



HANSON RIVET

& SUPPLY CO.
13241 Weidner Street
Pacoima, CA 91331

See pages C43-C46 for installation tools

Phone: 818-485-0500
FAX: 818-485-0540



Outside CA: 1-800-RRRIVET
www.hansonrivet.com




"T" STYLE BLIND RIVETS




T-Style Rivet bodies splits into petals and peels back onto the work surface upon setting. These rivets are designed for structural and similar high-strength applications. They offer exceptional pull-up properties and can be used in oversize holes.

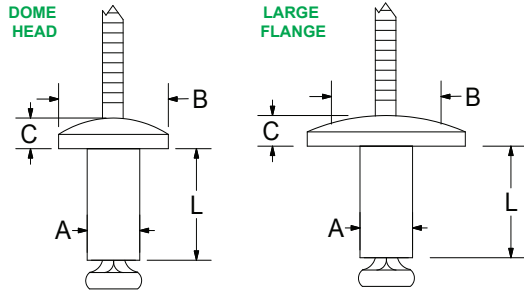

Backside Of Set Rivet

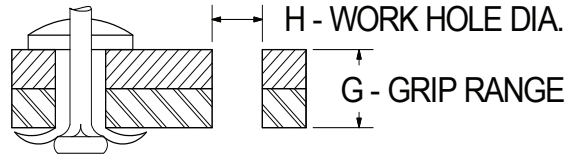

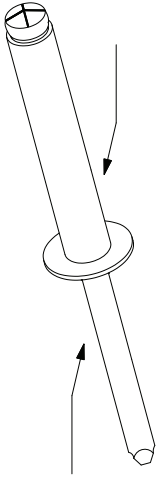RIVET MATERIAL MANDREL MATERIAL	HEAD STYLE	ITEM NUMBER	PART NUMBER	BODY DIAMETER "A"	WORK HOLE & DRILL SIZE "H"	GRIP RANGE "G"	BODY LENGTH (NOM.) "L"	HEAD DIAMETER (NOM.) "B"	HEAD HEIGHT (MAX.) "C"	TYPICAL ULTIMATE STRENGTHS IN LBS. (SEE NOTE)	
										SHEAR	TENSILE
ALUMINUM RIVET PLAIN FINISH  STEEL MANDREL Various colors and finishes available	DOME HEAD	PAST402	AD42TFBS	.125 1/8	.142 #27	.063-.125	.354	.242	.048	180	213
		PAST403	AD43TFBS			.126-.187	.433				
		PAST404	AD44TFBS			.188-.250	.512				
		PAST406	AD46TFBS			.251-.312	.590				
		PAST407	AD47TFBS			.313-.437	.669				
		PAST502	AD52TFBS			.156 5/32	.173 #17				
		PAST503	AD53TFBS	.126-.187	.433						
		PAST504	AD54TFBS	.188-.250	.512						
		PAST505	AD55TFBS	.251-.312	.590						
		PAST506	AD56TFBS	.313-.375	.669						
		PAST508	AD58TFBS	.376-.500	.748						
		PAST510	AD510TFBS	.501-.625	.827						
	PAST6140	AD6140TFBS	.187 3/16	.192/.196 #11	.032-.140	.447	.390	.103	950	1025	600
	PAST6187	AD6187TFBS			.141-.187	.510					
	PAST6250	AD6250TFBS			.188-.250	.572					
	PAST6312	AD6312TFBS			.251-.312	.635					
	PAST6375	AD6375TFBS			.313-.375	.697					
	PAST6437	AD6437TFBS			.376-.437	.760					
	PAST6519	AD6519TFBS	.438-.519	.822							
	PAST8140	AD8140TFBS	.250 1/4	.257/.261 F	.032-.140	.500	.510	.126	1425	1575	1100
PAST8187	AD8187TFBS	.141-.187			.552						
PAST8250	AD8250TFBS	.188-.250			.615						
PAST8312	AD8312TFBS	.251-.312			.677						
PAST8375	AD8375TFBS	.313-.375			.740						
PAST8437	AD8437TFBS	.376-.437			.802						
PAST8519	AD8519TFBS	.438-.519			.865						
PAST8620	AD8620TFBS	.520-.620			.937						
PASTL6075	AD6075TFBSLF	.187 3/16	.192/.196 #11	.046-.140	.382	.563	.103	950	600		
PASTL6140	AD6140TFBSLF			.032-.140	.447						
PASTL8140	AD8140TFBSLF			.250 1/4	.257/.261 F					.032-.140	.500

NOTE: Values for typical ultimate strengths are a guide only and may vary greatly depending upon the application.



HANSON RIVET

& SUPPLY CO.
13241 Weidner Street
Pacoima, CA 91331

See pages C43-C46 for
installation tools

Phone: 818-485-0500

FAX: 818-485-0540

Outside CA: 1-800-RRRIVET



www.hansonrivet.com



"T" STYLE BLIND RIVET



T-Style Rivets body splits into petals and peels back onto the work surface upon setting. These rivets are designed for structural and similar high-strength applications. They offer exceptional pull-up properties and can be used in oversize holes.

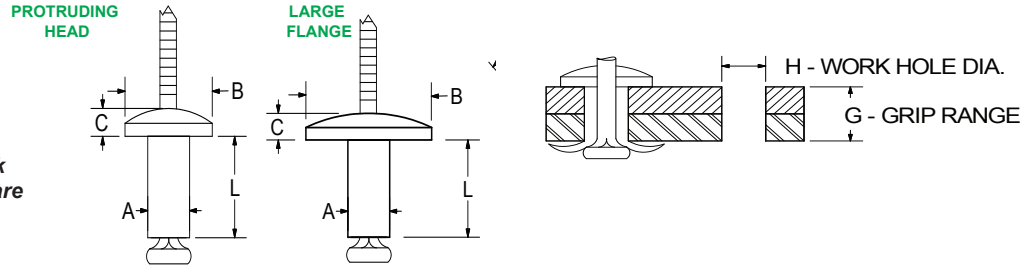

Backside of set rivet

RIVET MATERIAL MANDREL MATERIAL	HEAD STYLE	PART NUMBER	BODY DIAMETER "A"	WORK HOLE & DRILL SIZE "H"	GRIP RANGE "G"	BODY LENGTH (MAX.) "L"	HEAD DIAMETER (NOM.) "B"	HEAD HEIGHT (MAX.) "C"	TYPICAL ULTIMATE STRENGTHS IN LBS. (SEE NOTE)							
									SHEAR	TENSILE						
<p>ALUMINUM RIVET PLAIN FINISH</p> <p>ALUMINUM MANDREL</p> <p>Various colors and finishes available</p>	PROTRUDING HEAD	BAPTS-06-062	.187 3/16	.192/.196 #11	.046-.078	.395	.395	.091	800	550						
		BAPTS-06-093			.078-.109	.395										
		BAPTS-06-125			.109-.140	.395										
		BAPTS-06-156			.140-.171	.395										
		BAPTS-06-187			.171-.203	.457										
		BAPTS-06-218			.203-.234	.457										
		BAPTS-06-250			.234-.265	.529										
		BAPTS-06-281			.265-.296	.529										
		BAPTS-06-312			.296-.328	.582										
		BAPTS-06-343			.328-.359	.582										
		BAPTS-06-375			.359-.390	.645										
		BAPTS-06-406			.390-.421	.645										
	BAPTS-06-437	.421-.453	.707													
	BAPTS-06-468	.453-.484	.707													
	BAPTS-06-500	.484-.515	.770													
	BAPTS-08-125	LARGE FLANGE	.250 1/4	.257/.261 F	.093-.156	.500	.520	.110	1400	1000						
	BAPTS-08-187				.156-.218	.562										
	BAPTS-08-250				.218-.281	.625										
	BAPTS-08-312				.281-.343	.687										
	BAPTS-08-375				.343-.406	.750										
	BAPTS-08-437				.406-.468	.812										
	BAPTS-08-500				.468-.531	.875										
	BAPTS-08-562				.531-.593	.937										
	BALTS-06-062				LARGE FLANGE	.187 3/16					.192/.196 #11	.046-.078	.395	.562	.091	800
BALTS-06-093	.078-.109											.395				
BALTS-06-125	.109-.140											.395				
BALTS-06-156	.140-.171											.395				
BALTS-06-187	.171-.203	.457														
BALTS-06-218	.203-.234	.457														
BALTS-06-250	.234-.265	.529														
BALTS-06-281	.265-.296	.529														
BALTS-06-312	.296-.328	.582														
BALTS-06-343	.328-.359	.582														
BALTS-06-375	.359-.390	.645														
BALTS-06-406	.390-.421	.645														
BALTS-06-437	.421-.453	.707														
BALTS-06-468	.453-.484	.707														
BALTS-06-500	.484-.515	.770														
BALTS-08-125	LARGE FLANGE	.250 1/4	.257/.261 F	.093-.156	.500	.750	.110	1400	1000							
BALTS-08-187				.156-.218	.562											
BALTS-08-250				.218-.281	.625											
BALTS-08-312				.281-.343	.687											
BALTS-08-375				.343-.406	.750											
BALTS-08-437				.406-.468	.812											
BALTS-08-500				.468-.531	.875											
BALTS-08-562				.531-.593	.937											